



CRB14 series relay bases






PRC25mm

IM2 insert module

Technical data

Type	CRB1451.1	CRB1451.2
Applicable model	CR14	
Rated voltage	300V	
Rated current	12A	
Contact arrangement	1CO	2CO
Accessory	PRC25mm and IM2 insert module	
Dielectric strength adjacent contact circuits	2500	
Protection level	IP20	
Mounting method	35mm rail	
Conductor cross section solid and stranded	min.0.5mm ² /max.1.5mm ²	
Conductor cross section(A.W.G)	min.20/max.16	
Stripping length	10mm	
Screw Thread	cage clamp	
Ambient temperature(operation)	-25°C to +85°C	

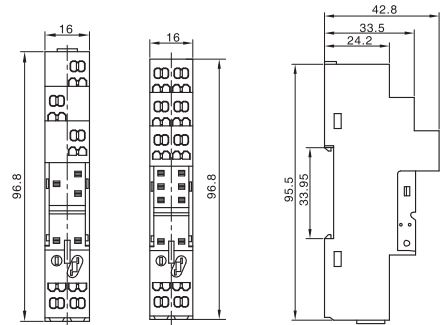




Technical data

Type	CRB1441.1	CRB1441.2
Applicable model	CR14	
Rated voltage	300V	
Rated current	12A	
Contact arrangement	1CO	2CO
Accessory	PRC25mm	
Dielectric strength adjacent contact circuits	2500	
Protection level	IP20	
Mounting method	panle or 35mm rail	
Conductor cross section solid and stranded	min.0.5mm ² /max.2.5mm ²	
Conductor cross section(A.W.G)	min.20/max.14	
Stripping length	7mm	
Screw Thread	M3	
Ambient temperature(operation)	-25°C to +85°C	



PRC25mm

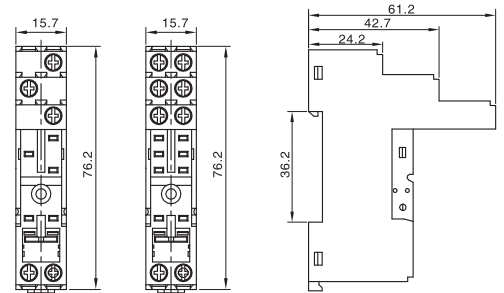



CRB14 series relay bases








PRC25mm



IM2 insert module

Technical data

Type	CRB1431.1	CRB1431.2
Applicable model	CR14	
Rated voltage	300V	
Rated current	12A	
Contact arrangement	1CO	2CO
Accessory	PRC25mm and IM2 insert module	
Dielectric strength adjacent contact circuits	2500	
Protection level	IP20	
Mounting method	panle or 35mm rail	
Conductor cross section solid and stranded	min.0.5mm ² /max.1.5mm ²	
Conductor cross section(A.W.G)	min.20/max.14	
Stripping length	7mm	
Screw Thread	M3	
Ambient temperature(operation)	-25°C to +85°C	








PRC25mm



IM2 insert module

Technical data

Type	CRB1421.1	CRB1421.2
Applicable model	CR14	
Rated voltage	300V	
Rated current	12A	
Contact arrangement	1CO	2CO
Accessory	PRC25mm and IM2 insert module	
Dielectric strength adjacent contact circuits	2500	
Protection level	IP20	
Mounting method	panle or 35mm rail	
Conductor cross section solid and stranded	min.0.5mm ² /max.2.5mm ²	
Conductor cross section(A.W.G)	min.20/max.14	
Stripping length	7mm	
Screw Thread	M3	
Ambient temperature(operation)	-25°C to +85°C	





CRB14 series relay bases



Technical data

Type	CRB1403.11	CRB1403.21
Applicable model		CR14
Rated voltage		300V
Rated current		10A
Contact arrangement	1CO	2CO
Accessory		---
Dielectric strength adjacent contact circuits		1500
Protection level		---
Mounting method		PCB
Conductor cross section solid and stranded		---
Conductor cross section(A.W.G)		---
Stripping length		---
Screw Thread		---
Ambient temperature(operation)		-25°C to +85°C

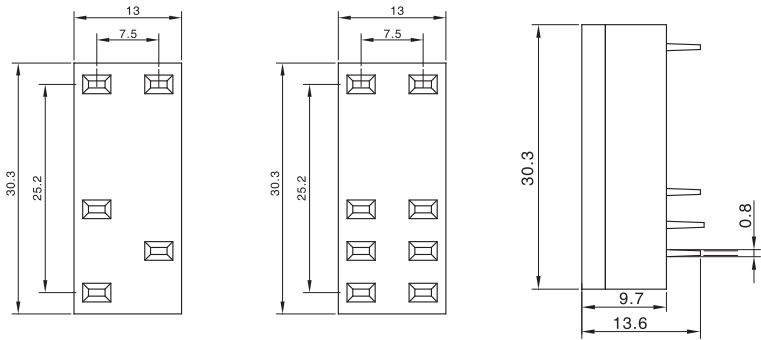

Technical data

Type	CRB1403.12	CRB1403.22
Applicable model		CR14
Rated voltage		300V
Rated current		10A
Contact arrangement	1CO	2CO
Accessory		---
Dielectric strength adjacent contact circuits		1500
Protection level		---
Mounting method		PCB
Conductor cross section solid and stranded		---
Conductor cross section(A.W.G)		---
Stripping length		---
Screw Thread		---
Ambient temperature(operation)		-25°C to +85°C

