







CRB15 series relay bases








Technical data

Type	CRB1503.1	CRB1503.2
Applicable model	CR15	
Rated voltage	300V	
Rated current	10A	
Contact arrangement	1CO	2CO
Accessory	---	
Dielectric strength adjacent contact circuits	2500	
Protection level	---	
Mounting method	PCB	
Conductor cross section solid and stranded	1.5mm ²	
Conductor cross section(A.W.G)	16	
Stripping length	---	
Screw Thread	---	
Ambient temperature(operation)	---	

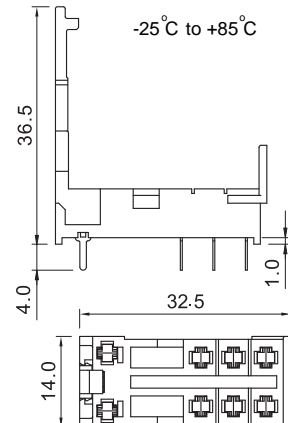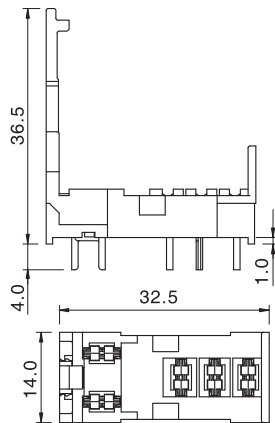

Technical data

Type	CRB1540.1	CRB1540.2
Applicable model	CR15	
Rated voltage	300V	
Rated current	10A	
Contact arrangement	1CO	2CO
Accessory	---	
Dielectric strength adjacent contact circuits	2500	
Protection level	---	
Mounting method	panle or 35mm rail	
Conductor cross section solid and stranded	1.5mm ²	
Conductor cross section(A.W.G)	16	
Stripping length	7mm	
Screw Thread	M3	
Ambient temperature(operation)	-25°C to +85°C	



CRB15 series relay bases

Technical data

Type	CRB1551.1	CRB1551.2
Applicable model	CR15	
Rated voltage	300V	
Rated current	12A	
Contact arrangement	1CO	2CO
Accessory	PRC25mm and IM2 insert module	
Dielectric strength adjacent contact circuits	2500	
Protection level	IP20	
Mounting method	panel or 35mm rail	
Conductor cross section solid and stranded	min.0.5mm ² /max.2.5mm ²	
Conductor cross section(A.W.G)	min.20/max.14	
Stripping length	7mm	
Screw Thread	M3	
Ambient temperature(operation)	-25°C to +85°C	



PRC25mm



IM2 insert module

